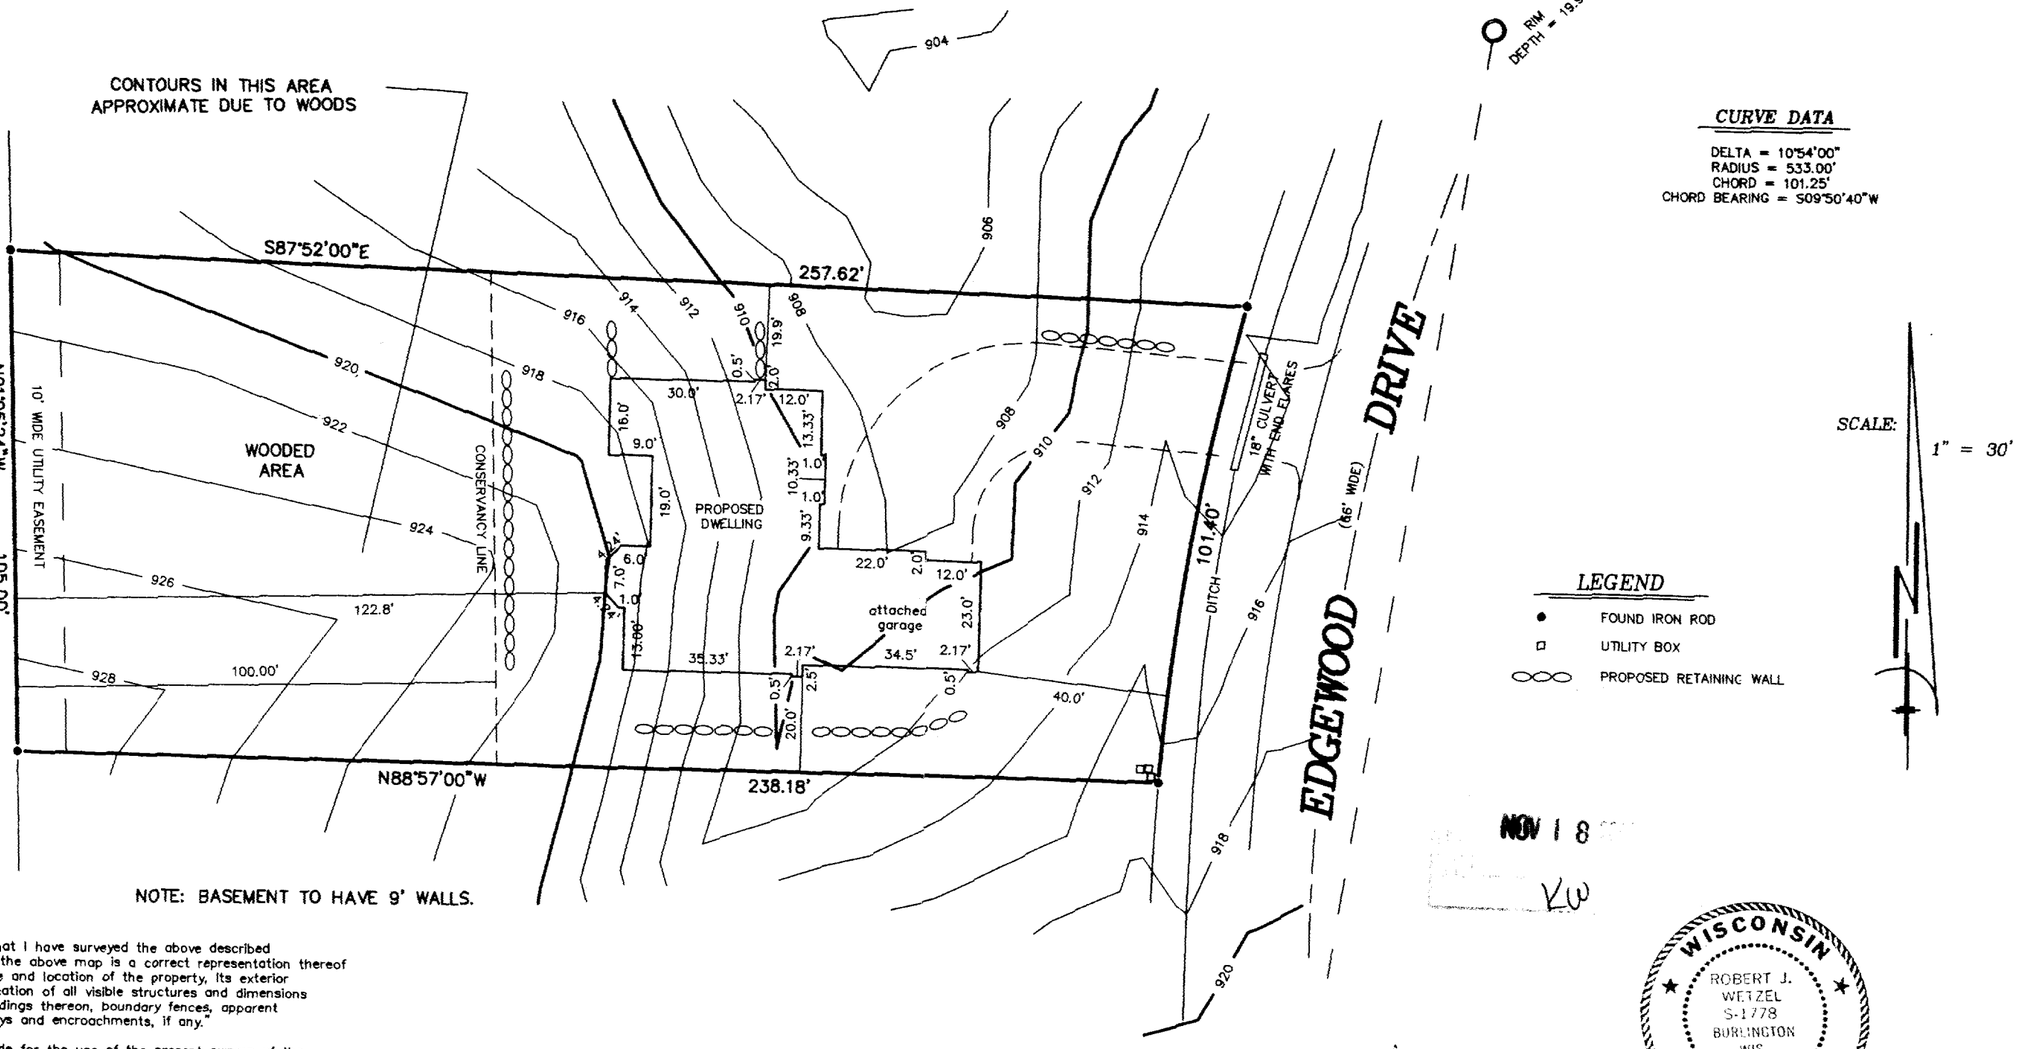


NOTE: BASEMENT TO HAVE 9' WALLS.

"I hereby certify that I have surveyed the above described property and that the above map is a correct representation thereof and shows the size and location of the property, its exterior boundaries, the location of all visible structures and dimensions of all principal buildings thereon, boundary fences, apparent easements, roadways and encroachments, if any."

"This survey is made for the use of the present owners of the property, and those who purchase, mortgage, or guarantee the title thereto within one year from date hereof."

CURVE DATA

DELTA = 10°54'00"
RADIUS = 533.00'
CHORD = 101.25'
CHORD BEARING = S09°50'40"W

SCALE: 1" = 30'

LEGEND

- FOUND IRON ROD
- UTILITY BOX
- PROPOSED RETAINING WALL

NOV 18

KW

WISCONSIN
ROBERT J. WETZEL
S-1778
BURLINGTON WIS.
LAND SURVEYOR

THIS IS NOT AN ORIGINAL PRINT UNLESS THIS SEAL IS RED.

B.W. SURVEYING, INC.

LAND SURVEYS
MAPPING AND PLANNING
412 N. PINE STREET
BURLINGTON, WI 53105
(262)-767-0225

PLAT OF SURVEY
-OF-

LOT 43 OF EDGEWOOD HILLS SUBDIVISION LOCATED IN THE SW 1/4 AND THE SE 1/4 OF THE NE 1/4 AND THE NE 1/4 AND THE NW 1/4 OF THE SE 1/4 OF SECTION 26, TOWN 2 NORTH, RANGE 17 EAST, CITY OF LAKE GENEVA, WALWORTH COUNTY, WISCONSIN.

SURVEY FOR: DITTER SYSTEM BUILDERS
SURVEY LOCATION: ____ EDGEWOOD DRIVE

PROPOSED TOP OF FOUNDATION: 918.0
PROPOSED YD. GR.: 917.33 PER BUILDER

NOTE: PROPOSED DWELLING TO BE STAKED UPON NOTIFICATION BY THE ABOVE NAMED CLIENT.

NOTE: PROPOSED RETAING WALLS AS SHOWN PER BUILDER.

ROBERT J. WETZEL S-1778

OCTOBER 10, 2003 — DATE

6014 — JOB NUMBER

ZEH-43

007-2139